



# TPSh-M6M144SH1W


Recommended



Residential Roof



Utility Scale Ground Mounted

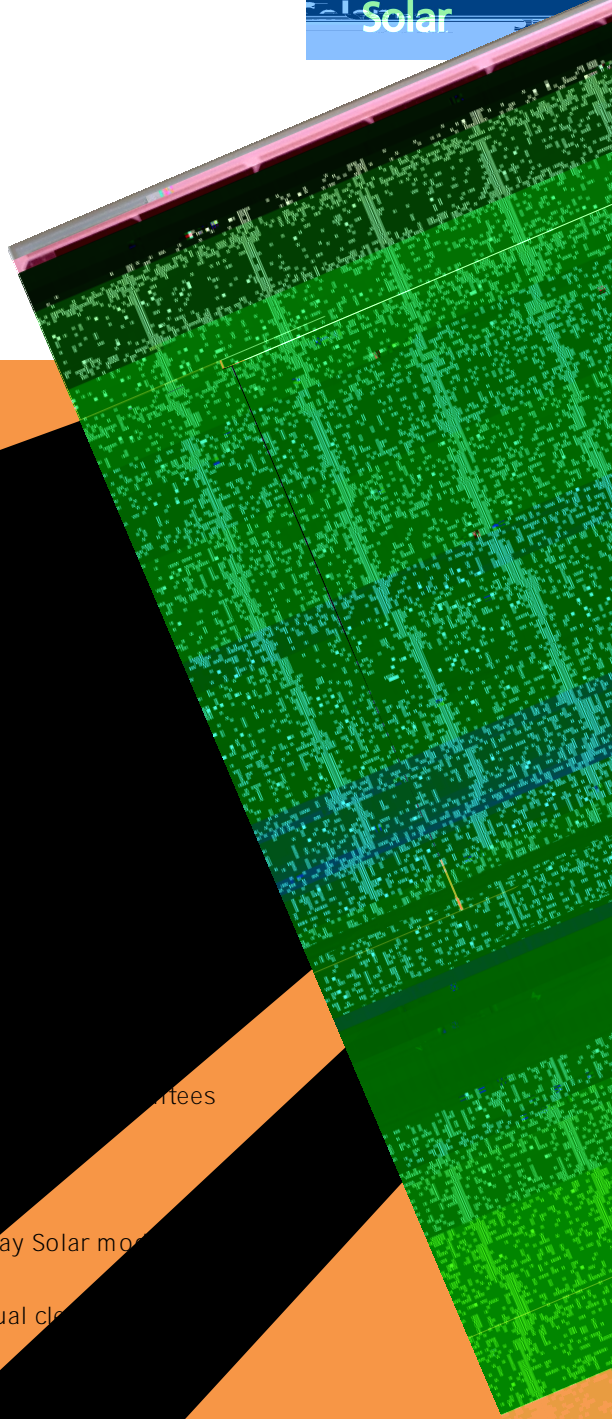

## Half Cell:

Half cell design allows the panel to be operated in half of the original power.

Lower the internal resistance of the CTM.

Top panel

and

TPSh-M6M144SH1W is certified by TUV SUD according to IEC 61215 and IEC 61730.

TPSh-M6M144SH1W is certified by TUV SUD according to IEC 61215 and IEC 61730.


TPSh-M6M144SH1W is certified by TUV SUD according to IEC 61215 and IEC 61730.

TPSh-M6M144SH1W is certified by TUV SUD according to IEC 61215 and IEC 61730.

TPSh-M6M144SH1W is certified by TUV SUD according to IEC 61215 and IEC 61730.

TPSh-M6M144SH1W is certified by TUV SUD according to IEC 61215 and IEC 61730.

## Certification

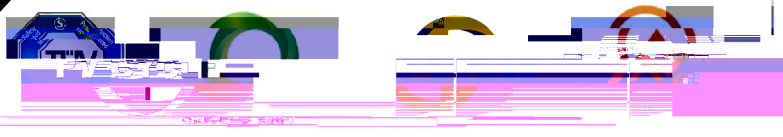

# TPSh-M6M144SH1W

## Mechanical Specification


Module Series
Maximum Power at STC(Pmax) (W)
Short Circuit Current (A)

Nominal Operating Cell Temperature(NOCT)
Temperature Coefficient of Pmax( )
Temperature Coefficient of Voc( )
Temperature Coefficient of Isc( )